

DHI-VTH2421FW-P/DHI-VTH2421FB-P

Digital VTH



- 7" TFT Capacitive touch screen, 1024 x 600
- IPC surveillance
- Alarm integration
- High performance & Cost-effective
- Embedded 8GB SD card
- Support standard PoE




Technical Specification

| | |
|-------------------------------|--|
| Main Processor | High performace embedded processor |
| Operating System | Embedded LINUX OS |
| Screen Type | Capacitive screen |
| Display | 7-inch TFT screen |
| Resolution | 1024 × 600 |
| Video Compression | H.264 |
| Audio Compression | G.711A/G.711U/PCM |
| Audio Input | 1 channel all-direction microphone |
| Audio Output | Built-in 1.5W loudspeaker |
| Audio Mode | Support dual-way bidirectional talk |
| Audio Enhancement | Support echo cancellation/DNR |
| Audio Bit Rate | 16 kbps |
| Communication Mode | Full digital |
| Information Release | Support to receive and view notifications issued by center |
| Leave Videos or Text Messages | Support |
| DND Mode | Support to set DND period |
| Sub-station Quantity | 9 |

| | |
|-----------------------|---|
| Alarm Input | 6 channel (switch quantity) |
| Alarm Output | 1 channel |
| Network | 1 RJ-45 |
| SOS Alarm | Support |
| Casing | PC+ABS |
| Appearance Color | Appearance Color |
| Power Supply | Standard PoE DC 12V 1A |
| Installation | Wall mount |
| Accessories | Default bracket Default alarm cable |
| Dimensions | 119.6 mm × 221.5 mm × 21.5 mm (4.71" × 8.72" × 0.85") |
| Operating Temperature | -10°C to +55°C (+14°F to +131°F) |
| Operating Humidity | 10%RH-95%RH |
| Power Consumption | Standby≤4W, work≤6W |
| Gross Weight | 0.35 Kg (0.77 lb) |
| Power supply mode | PoE |
| Storage | Support Micro SD, maximum memory capacity 32 G, standard memory capacity 8 G |

Dimensions (mm[inch])

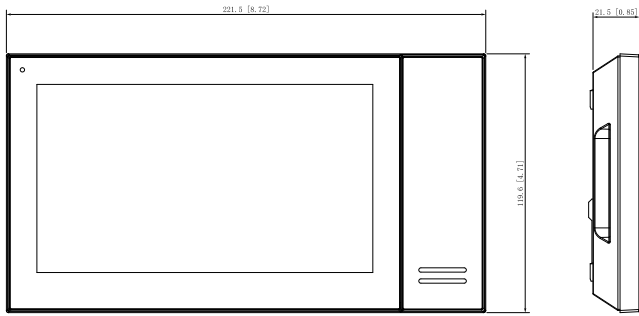

Application

