


GSM-WiFi

Plug-on Dual Path GSM & WiFi Unit for use with SecureComm

The GSM-WiFi unit offers dual-path connectivity via SecureComm (our cloud based solution).

SecureComm provides a heartbeat (polled) connection to the GSM-WiFi which will signal a loss of communication in the event of an interruption in both paths.* All alarms and alerts are notified to the user via the SmartPhone APP (audible and text).

When using IP Monitoring, the alarm transmission system is Grade 3 compliant. Note: standard default polling time is 1 hour.

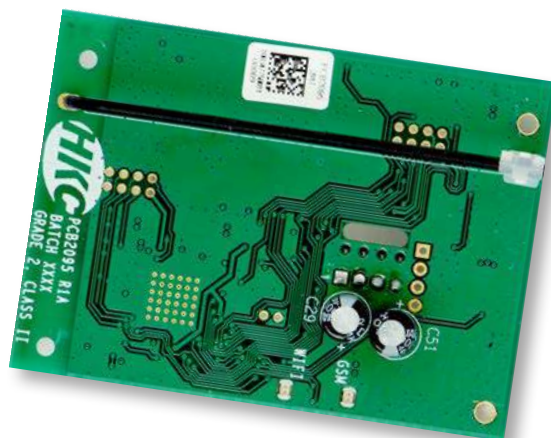

SecureComm

Features:

- Plugs directly onto Quantum 70 panel (version 4.0 or higher panel software required)
- Plugs directly onto SW-10270 panel (version 4.0 or higher panel software required)
- Dual paths via GSM network & WiFi
- Works with HKC App
- Alarm reports from the System via SmartPhone app and SMS text messaging
- Jam Detection & Heartbeat connection monitored
- Supports IP Reporting to Monitoring Centre/ARC
- Can be configured to signal Monitoring Centre/ARC in the event of a loss of communication*
- Supports high-speed upload / download via SmartLink700
- Pre-soldered with SecureComm data World SIM
- Current: Quiescent, 30mA. Transmit, 70mA
- Temperature: -10 to +40°C
- Weight: 20g
- Size: 70mm x 50mm x 24mm
- EN 50136-1: SP3 & DP2 with 10 minute polling
- EN 50131-1: ATS 4, Class II
- BS 8243 & PD 6662



*Dependent on network provider

Irish Technical Support: 01 4567 007
UK Technical Support: 01706 838 746

An ASSA ABLOY Group brand

Experience a safer
and more open world