

DC-T4536HRX



5M IR Bullet Camera with Heater/ NDAA Compliant

- 5MP (2592x1944) resolution
- Two-way audio
- Built-in heater
- IR LED (Distance : 30m / 98.4ft)
- Easy installation with DirectIP NVR
- Motorized Vari-focal lens (f=3.0 - 13.5mm)
- Alarm in / out
- Day and night (ICR)
- 3-axis mechanical design for installation
- Supports ONVIF
- micro SD/SDHC/SDXC
- IK10 / IP67 supports
- True wide dynamic range (WDR)
- PoE (IEEE 802.3af Class 3), 12V DC

SPECIFICATIONS

Video	
Image Sensor	1/2.8
Max. Resolution	2592 x 1944
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	f=3.0-13.5mm
Aperture	F1.4 - 3.2
Iris Control	DC IRIS
Angular Field of View	Wide : 91°(H) 66°(V) 120°(D) Tele : 31°(H) 23°(V) 38°(D)
Min. Illumination	COLOR : 0.15 lux @ F1.4 B/W : 0 lux (IR LED ON)
Dynamic Range	120dB (True WDR)
Electronic Shutter Speed	Auto / Manual (1/30 - 1/10,000), Anti-Flicker, Slow Shutter (1/7.5, 1/15)
Day and Night	IR cut filter with auto switch
IR Distance (LEDs)	30m / 98.4 ft (6ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	On / Off
Mirroring / Pivot	Horizontal / Vertical / Pivot
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Network	
Video Compression	H.265, H.264 (MP) M-JPEG
Intelligent Codec	Supported
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF Profile S
Max. Frame Rate	4:3 mode : 30ips : 2592 x 1944(WDR) 16:9 mode : 30ips : 2592 x 1456(WDR)
Supported Resolution	4:3 : 2592x1944, 1920x1440, 1280x960x 640x480 16:9 : 2592x1456, 1920x1080, 1280x720, 640x360
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, Upnp, SNMPv2
Security	SSL Encryption, Multi-user Authority, IEEE 802.1x IP Filtering, HTTPS
Remote Access Client	DirectIP NVR Connection, IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLSRec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 512GB)
ALARM AND EVENT	
Trigger Event	Motion Detection, Alarm in, Audio Detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio In / Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67, Heater
Operating Temperature	-40°C ~ 55°C (-40°F ~ 131°F) *Starting up at above -20°C (-4°F)
Operating Humidity	0% ~ 90%
Electrical	
Power Source	12VDC, PoE IEEE 802.3af (Class 3)
Power Consumption	12V=, 1.1A, 13.2W PoE, IEEE 802.3af(Class 3), 11W
Approval	FCC, CE, KC
Mechanical	
Dimensions (W x H)	80mm X 75mm X 237mm (3.15" x 2.95" x 9.33")
Weight	0.97 kg(2.14lb)




PRODUCT IMAGE









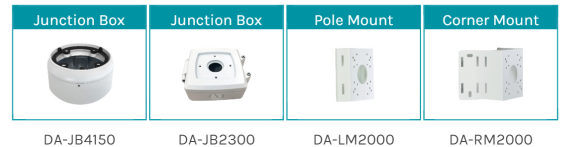





DIMENSIONS



ACCESSORIES (OPTIONAL)



ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-T4536HRX	WALL	 JUNCTION BOX Model: DA-JB4150
		or
		 JUNCTION BOX Model: DA-JB2300
	CELLING	 JUNCTION BOX Model: DA-JB4150
		or
		 JUNCTION BOX Model: DA-JB2300
	POLE	 JUNCTION BOX Model: DA-JB4150
		+
		 POLE MOUNT Model: DA-LM2000
		or
		 JUNCTION BOX Model: DA-JB2300
	+	
	 POLE MOUNT Model: DA-LM2000	
	CORNER	 JUNCTION BOX Model: DA-JB4150
+		
 CORNER MOUNT Model: DA-RM2000		
or		
 JUNCTION BOX Model: DA-JB2300		
+		
 CORNER MOUNT Model: DA-RM2000		