

DC-T4233WRX

Full HD IR Bullet Camera



- Easy installation with DirectIP NVR
- micro SD/SDHC/SDXC
- IK10 / IP67 supports
- IR LED (Distance : 30m / 98.4ft)
- Full HD (1080p) resolution
- Two-way audio
- PoE (IEEE 802.3af Class 3), 12V DC
- 3-axis mechanical design for installation

- Motorized Vari-focal lens (f=2.8 - 12mm)
- Alarm in / out
- Day and night (ICR)
- Supports ONVIF

SPECIFICATIONS

Video	
Image Sensor	1/2.8" CMOS
Max. Resolution	1920 x 1080
Scanning Mode	Progressive Scan
Lens Type	Motorized Vari-focal
Focal Length	f=2.8-12mm
Aperture	F 1.4-2.8
Iris Control	DC IRIS
Angular Field of View	Wide : 98°(H) 51°(V) 116°(D) Tele : 33°(H) 19°(V) 38°(D)
Min. Illumination	COLOR : 0.1 Lux @ F1.4, B/W : 0 Lux (IR LED ON)
S/N Ratio	More than 45dB
Electronic Shutter Speed	Auto / Manual (1/30 - 1/10,000), Anti-Flicker, Slow Shutter (1-1/5, 1/7.5, 1/15)
Day and Night	IR cut filter with auto switch
IR Distance (LEDs)	30m / 98.4 ft(6 ea)
Image Setting	Exposure, White Balance, Self-Adjusting Video Mode(Sharpness, Contrast, Colors, Brightness Control)
Backlight Compensation	On / Off
Mirroring / Pivot	Horizontal / Vertical / Pivot
De-fog	On / Off
De-fog	Yes
Privacy Masking	8 Zones
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone
Network	
Video Compression	H.265, H.264 (MP) M-JPEG,
Intelligent Codec	Supported
Video Compression Level (Quality)	Basic, Standard, High, Very High
Bitrate Control	H.265 - CBR / VBR, H.264 - CBR / VBR
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law
Two-way Audio	Yes
IP Camera Protocol	DirectIP 2.0, ONVIF
Max. Frame Rate	30fps : 1920 x 1080(WDR)
Supported Resolution	1920x1080, 1280x720, 704x480, 640x360, 352x240
Multi-video Streaming	Quadruple Streaming
Network Protocols	DirectIP 2.0 Protocol, IPv4, IPv6, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNTp, SMTP, FEN, mDNS, uPNP, SNMPv2
Security	SSL Encryption, Multi-user Authority, IEEE 802.1x, IP Filtering, HTTPS
Remote Access Client	DirectIP NVR Connection, IDIS Web, IDIS Mobile, IDIS Solution Suite
Ethernet	RJ45 (10/100BASE-T)
Recording Session Buffer (NLTsrec)	Yes (Up to 60MB)
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 256GB)
ALARM AND EVENT	
Trigger Event	Motion Detection, Alarm in, Audio Detection, Tampering, Trip Zone
Event Notification	Remote S/W, Email (with Image)
Audio In/ Out	1 / 1
Alarm In / Out	1 / 1
Environmental	
Vandal Proof Casing	IK10
Outdoor Ready	IP67
Material	Metal
Operating Temperature	-20°C - +60°C (-4°F - +140°F)
Operating Humidity	0% - 90%
Electrical	
Power Source	12VDC, PoE IEEE 802.3af (Class 3)
Power Consumption	12V=, 1.21A, 14.52W PoE, IEEE 802.3af(Class 3) , 11.1W
Approval	FCC, CE, KC
Mechanical	
Dimensions (W x H)	Φ 77mm X 244.1mm (Φ 3" x 9.61")
Weight	0.84 kg




PRODUCT IMAGE



DIMENSIONS



ACCESSORIES (OPTIONAL)

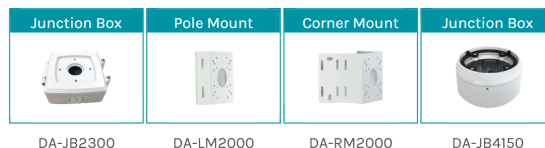













DA-JB2300

DA-LM2000

DA-RM2000

DA-JB4150

ACCESSORY CONFIGURATION BY INSTALLATION ENVIRONMENT

PRODUCT	INSTALLATION ENVIRONMENT	ACCESSORY CONFIGURATION
DC-T4233WRX	WALL	 JUNCTION BOX Model: DA-JB2300
		or
		 JUNCTION BOX Model: DA-JB4150
	CELLING	 JUNCTION BOX Model: DA-JB2300
		or
		 JUNCTION BOX Model: DA-JB4150
	POLE	 JUNCTION BOX Model: DA-JB2300
		+
		 POLE MOUNT Model: DA-LM2000
		or
		 JUNCTION BOX Model: DA-JB4150
		+
	 POLE MOUNT Model: DA-LM2000	
	CORNER	 JUNCTION BOX Model: DA-JB2300
+		
 CORNER MOUNT Model: DA-RM2000		
or		
 JUNCTION BOX Model: DA-JB4150		
+		
 CORNER MOUNT Model: DA-RM2000		